



GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

GBU6A THRU GBU6M

VOLTAGE RANGE

50 to 1000 Volts

CURRENT


6.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Ideal for printed circuit boards
- Glass passivated chip junctions
- High surge current capability
- High temperature soldering guaranteed
260°C/10 seconds, 0.375" (9.5mm) lead length at 5 lbs. (2.3kg) tension

MECHANICAL DATA

- Case: molded plastic body over passivated junctions
- Terminal: Plated leads solderable per MIL-STD-750 Method 2026
- Mounting position: Any (Note 2)
- Mounting Torque: 5 in-lb. Max.
- Weight: 0.15 ounce, 4.0 gram

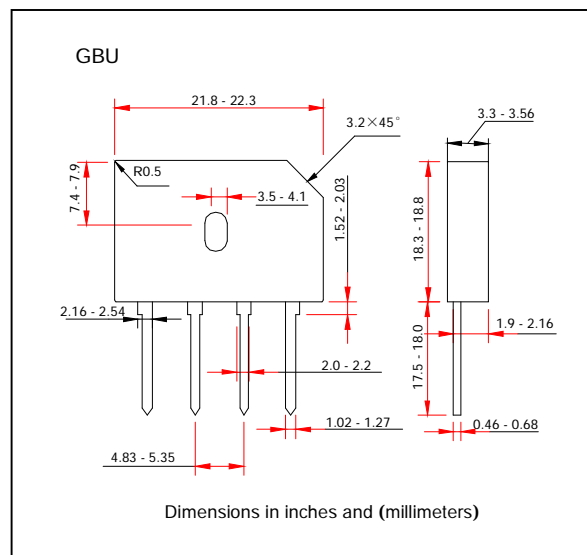

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	GBU 6A	GBU 6B	GBU 6D	GBU 6G	GBU 6J	GBU 6K	GBU 6M	UNIT
Maximum Reverse Peak Repetitive Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	100	Volts
Maximum Average Forward Rectified Output Current, At $T_C=100^\circ\text{C}$ (Note 1,2)	$I_{(AV)}$	6.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)	I_{FSM}	150							Amps
Rating for Fusing ($t < 8.3\text{ms}$)	I^2t	127							A^2s
Maximum Instantaneous Forward Voltage drop Per leg at 4.0A	V_F	1.0							Volts
Maximum Reverse Current at rated DC blocking voltage per element	$T_A=25^\circ\text{C}$	5.0							Amps
	$T_A=125^\circ\text{C}$	500							mAmps
Typical Junction Capacitance (Note 4)	C_J	211			94				pF
Typical Thermal Resistance (Note 1)	R_{JA}	21							$^\circ\text{C}/\text{W}$
Typical Thermal Resistance (Note 2)	R_{JL}	2.2							$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}	(-55 to +150)							$^\circ\text{C}$

- Notes:**
1. Unit mounted on $2.6 \times 1.4 \times 0.06''$ thick ($6.5 \times 3.5 \times 0.15\text{cm}$) AL plate heatsink
 2. Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum Heat transfer with #6 screw
 3. Measured at 1.0 MHz and applied reverse voltage of 4.0 V



GLASS PSSIVATED SINGLE-PHASE BRIDGE RECTIFIER

GBU6A THRU GBU6M

VOLTAGE RANGE

50 to 1000Volts

CURRENT

6.0 Ampere

RATINGS AND CHARACTERISTIC CURVES GBU6A THRU GBU6M

FIG. 1- DERATING CURVE
OUTPUT RECTIFIED CURRENT

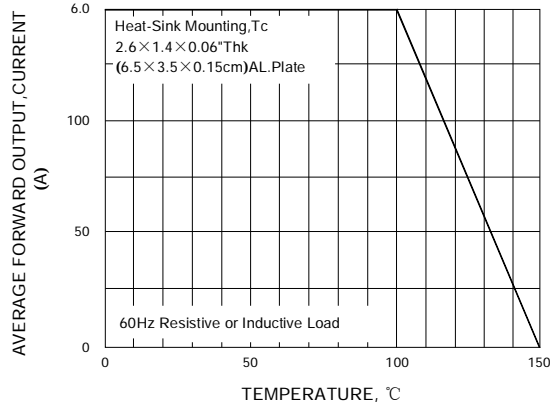


FIG. 2- MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT PER LEG

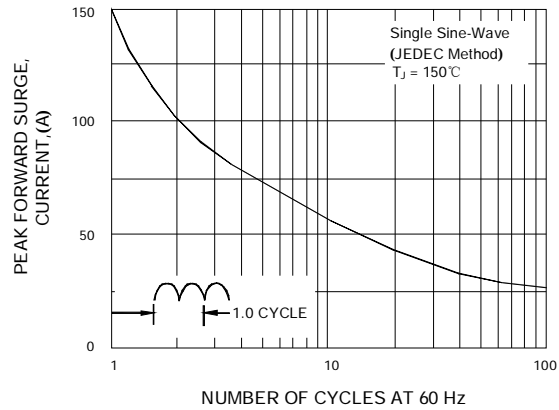


FIG. 3- TYPICAL FORWARD CHARACTERISTICS
PER LEG

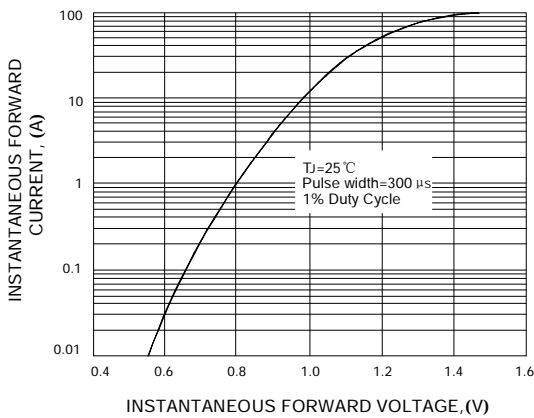


FIG. 4- TYPICAL REVERSE LEAKAGE
CHARACTERISTICS PER LEG

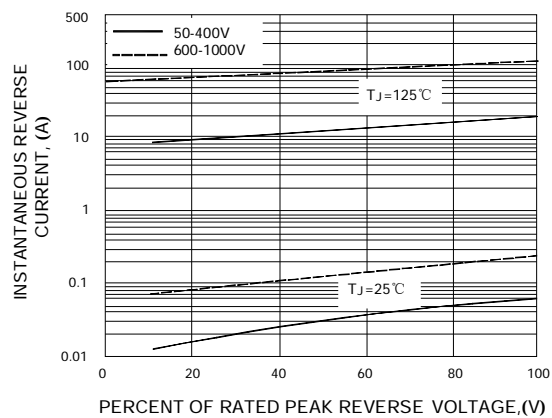


FIG. 5- TYPICAL JUNCTION CAPACITANCE
PER LEG

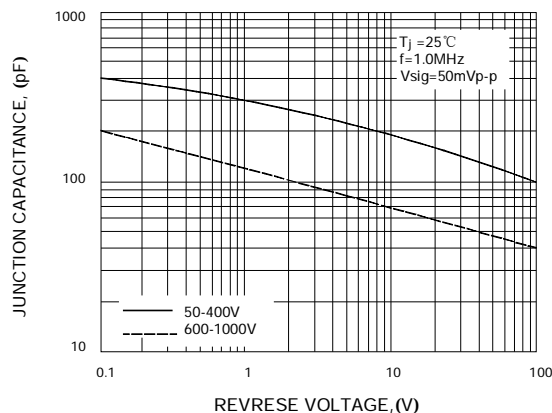


FIG. 6- TYPICAL TRANSIENT THERMAL
IMPEDANCE

